


PUGGLE

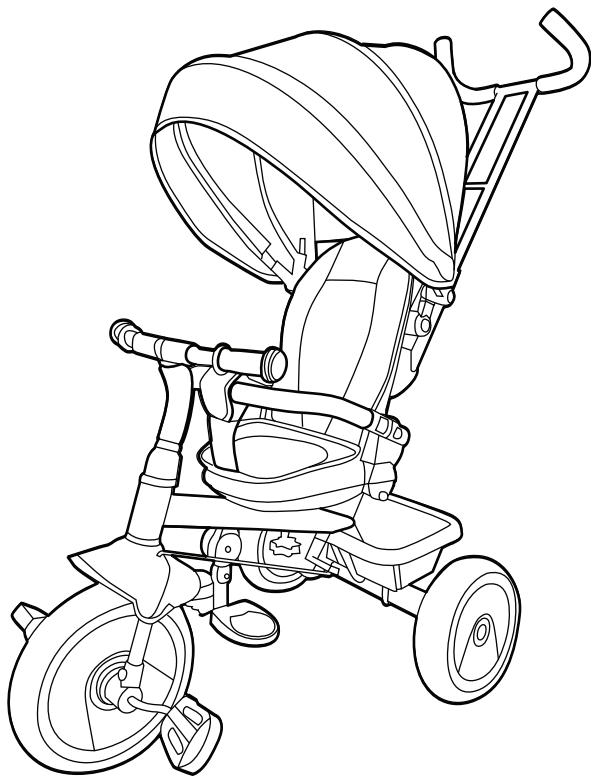

Easy Twist 6 in 1 Trike

Instruction Manual

Welcome

Thank you for purchasing the **Puggle Easy Twist 6 in 1 Trike**.

This instruction manual will guide you through the setup, use, and maintenance of your new product, ensuring you get the most out of its versatile features. Please read through the following information and safety warnings carefully to fully understand and enjoy all the benefits your **Easy Twist 6 in 1 Trike** has to offer, and to ensure its safe operation.

We're here to help!

If you have a query with this product or require replacement parts, please contact us at:
support@pugglebaby.co.uk

Important Information

IMPORTANT! Your 6 in 1 Trike may differ slightly from images shown above and throughout, as the images used are for illustration purposes only.

Your 6 in 1 Trike is tested to comply with EN 71.

- Bags and other items should not be hung from the handles as this can affect the stability of the product.
- DO NOT use parts or accessories which are not approved or supplied by the manufacturer.
- DO NOT allow your child to play with this product without adult supervision.
- Ensure that the basket is emptied and any accessories are removed prior to folding.
- A basket is provided for the carriage of items evenly distributed upto a maximum of kg.
- Overloading, incorrect folding and the use of non-approved accessories is unsafe and may damage or break this product.
- If a raincover is supplied, do not leave the raincover on indoors, in a hot atmosphere or near a heat source as your child may overheat.
- To prevent damage, remove the raincover before folding.
- Do not place anything on top of the raincover.

IMPORTANT – Read the instructions carefully before use and keep for future reference.

- WARNING: A child's safety is your responsibility.
- WARNING: Adult assembly is required.
- WARNING: Ensure that all components are fitted securely into place and tightened where applicable before allowing your child to play with the 6 in 1 trike.
- WARNING: Ensure that the child is supervised by an adult when using the 6 in 1 trike at all times, and is taught about the correct usage of the product.
- WARNING: Ensure that all locking devices are engaged before usage.
- WARNING: This product is suitable for use by one child at a time only.
- WARNING: DO NOT overload this product, maximum capacity is 25kg.
- Approximate age range is 9 months to 5 years.
- WARNING: Keep hands and other limbs away from moving parts such as the wheel to prevent entrapment and injury.
- WARNING: Protective equipment should be worn. Children should wear approved protective equipment e.g. helmet and correct fitting is required.
- WARNING: DO NOT allow a child to ride on roadways, public highways or alleys. Not to be used in traffic.
- WARNING: DO NOT allow a child to ride on steeply sloped areas, near steps, swimming pools, or other bodies of water.
- For use on smooth, paved surfaces only.
- Ensure that the rider keeps both hands on the handlebar at all time for proper control.
- WARNING: DO NOT allow a child to ride the product at dusk, at night or at times of limited visibility.
- Children should be reminded that the toy should be used with caution, since it requires skill, so as to avoid falls or collision causing injury to the user and third parties. They should also be reminded of the dangers of using this product on public highways.
- All assembly fittings should always be tightened properly, checked periodically and the care should be taken that no bolts are loose, because a child could trap parts of the body or clothing (e.g. strings, necklaces, ribbons for babies' dummies), which could pose a risk of suffocation and strangulation.
- Replace broken or worn parts immediately, only use parts supplied or approved by the manufacturer.
- This 6 in 1 Trike conforms to BS EN 71.

Battery Instructions

Symbols and their meaning:

There are a number of symbols used through this manual, please find below breakdown of what each symbol is and what it means:

	European conformity – This mark is applied to both physical product and product packaging, indicating conformity with the relevant European testing standards.
	UK Conformity Assessed – This mark is applied to both physical product and product packaging, indicating conformity with the relevant UKSI testing standards.
	Direction indicator showing direction of assembly, rotation, function.

What's in the box:

- 1x Puggle Easy Twist 6 in 1 Trike
- 1x Instruction manual

Before Assembly:


Before assembly, please ensure that you have read and understood the instructions. Then carefully unpack your Easy Twist 6 in 1 Trike and ensure that all parts are present, please see parts list as follows.

Discard packaging in accordance with your local authority guidelines.

The Easy Twist 6 in 1 Trike should be assembled on a clean surface, free from any sharp objects that could mark or damage the product.

CAUTION: There are many small components used in the construction of this folding travel trike. These items should be kept out of reach of young children whilst assembling the unit.

Parts List

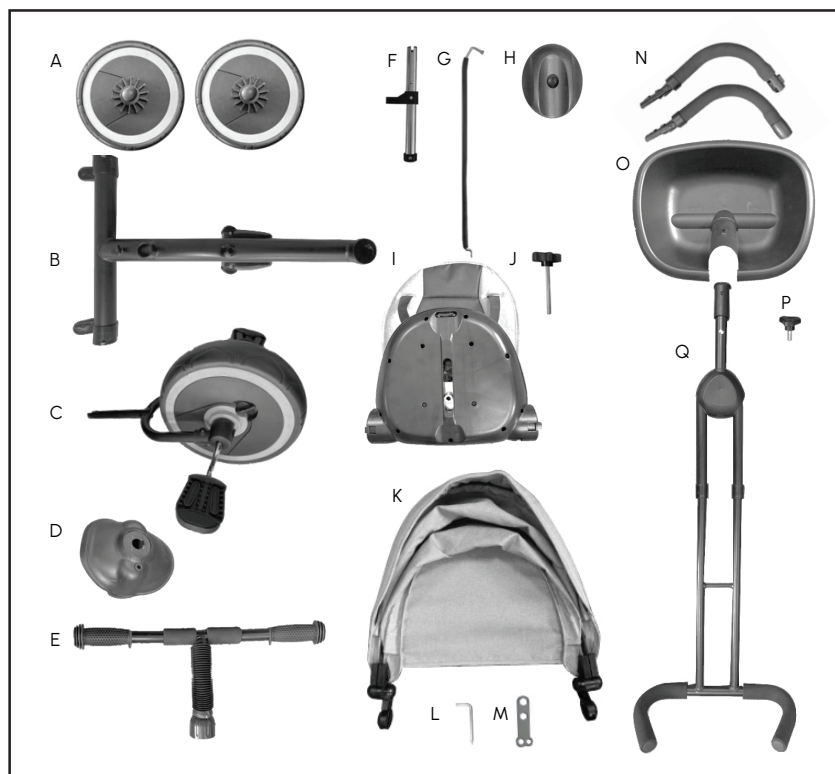


Part: Description:

- A. Rear wheels x2
- B. Trike Frame
- C. Front wheel
- D. Mudguard
- E. Handlebar
- F. Steering post
- G. Steering rod
- H. Seat platform
- I. Seat unit
- J. Seat adjustment knob
- K. Canopy
- L. Allen key/cross-head screwdriver
- M. Spanner
- N. Bumper bar parts x 2
- O. Basket
- P. Small attachment knob
- Q. Steering handle

Assembling the rear Wheels

1. Remove caps from rear wheel (A) axles

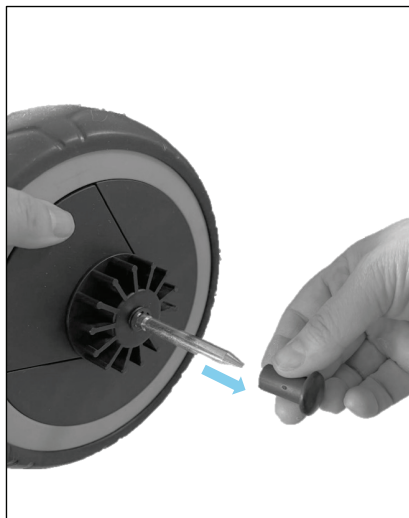


2. Insert wheel axles (A) into rear of frame (B)




Assembling the front wheel mudguard


3. Remove cap from front wheel (C) post

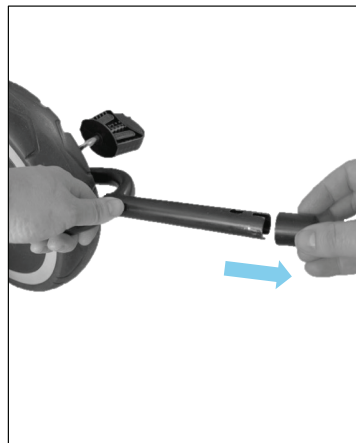

4. Insert front wheel post (C) into mudguard (D) and slide the mudguard down until it rests on the top of the front wheel tubing

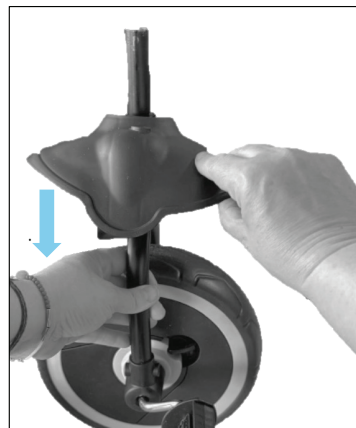

5. Insert the front wheel tubing (C) into the front of the trike frame (B)

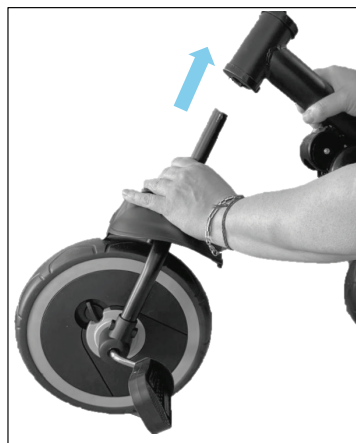

Assembling the handlebar

6. Lift the sleeve on the handlebar (E) and unscrew the bolt.

Insert the handlebar (E) through the frame (B) and into the front wheel tubing (C) . Reinsert the bolt



7. Replace the washer and nut to the bolt




8. Tighten with the spanner (M) provided



Assembling the steering post


9. Remove the cap from the bottom of the steering post (F) using the cross-head screwdriver (L)

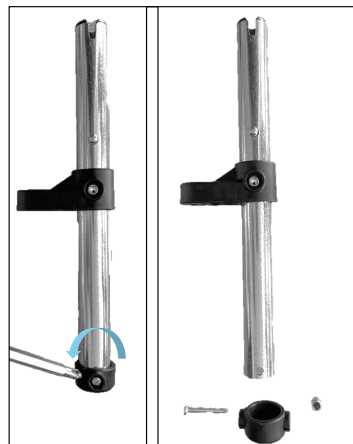

10. Insert the steering post (F) into the tube at the back of the trike frame (B)




11. Replace the cap. Secure in place using the nut and screw. Use the cross-head screwdriver to tighten the screw

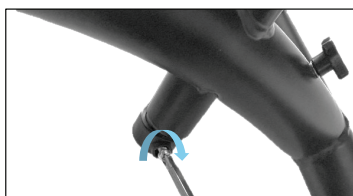

Assembling the steering rod

13. Insert the front of the steering rod (G) vertically into the hole in mudguard (D)

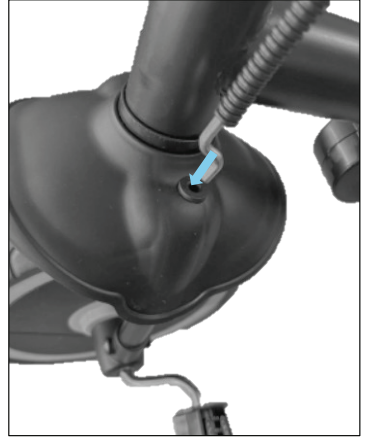

14. Rotate the steering rod (G) backwards until it is horizontal



15. Insert the back of the steering rod into the hole on the arm of the steering post (F) and secure with the nut provided. Use the spanner to tighten (M)



Assembling the seat

16. Squeeze the adjuster on the back of the seat unit (I) and unfold it



17. Align the hole in the seat platform (H) with the seat tubing in the trike frame (B)



18. The seat platform (h) should be horizontal when placed on the frame



Assembling the seat continued

19. Align the fitting on the underside of the seat unit (I) with the hole in the top of the seat platform (H)



20. Insert the seat adjustment knob (J) into the bottom of the frame (B) seat tubing. Turn the adjustment knob (J) clockwise until the seat is secured



21. Install the canopy (K) by sliding onto the attachment points on the seat unit (I)



Installing the bumper bar

22. Insert the ends of the bumper bar (N) into the brackets on the seat unit (I) until you hear a click



23. To connect the bumper bar (N) insert the one half into the other until the button clicks into place



Installing the basket

24. Slot the basket (O) onto the back post of the trike frame (B) so that the bottom is resting on the wheel axle



25. Secure in place with the small attachment knob (P)



Assembling the parent steering handle

25. Slide the end of the steering handle (Q) over the steering post (F) until you hear a click




26. Secure by rotating the lever upwards and snapping into place



Adjusting the Canopy

27. Open the canopy (K) with two hands

To fully extend, place hands on both canopy bars, near the bracket and pull apart until you hear a click. Repeat on the other side

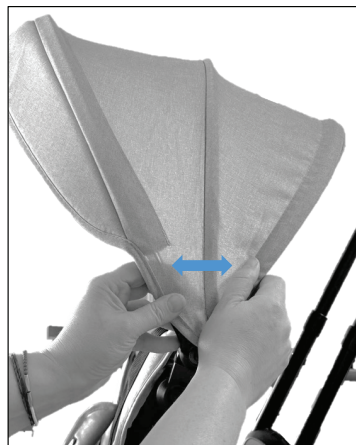

28. The canopy can be tilted forwards or backwards using the back canopy bar



Adjusting the Footrest

29. Pull both footplates open



30. Pull the collar down on the footrest tubing to release and rotate downwards. Reverse the process to fold the footrest



Adjusting the Seat

31. Loosen the seat adjustment knob (J) on the underside of the seat unit (I).



32. Rotate the seat unit (I) to the desired direction (parent facing or world facing)




33. Slide the seat unit (I) forward or backwards to the desired position. This is ideal for finding the correct position for the child to reach the pedals or footrest.



Always tighten the seat adjustment knob (J) fully after adjusting

Reclining the Seat

34. Squeeze the adjuster on the back of the seat unit (I)

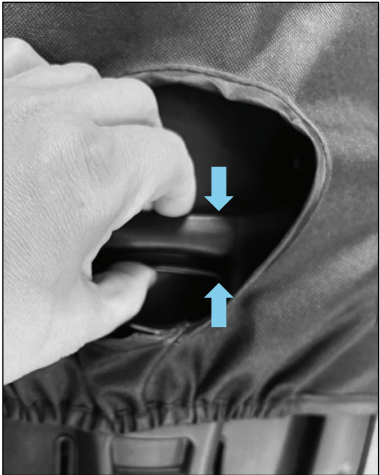

35. Recline the seat back to the desired angle



Adjusting/removing the steering handle

36. To adjust the height of the steering handle (Q) press the spring pin to move between 3 height positions




37. To remove the steering handle (Q) unclip the latch and rotate it until it depresses the spring pin to release the handle



Using the brakes

38. There are two brakes. One on each of the rear wheels (A)

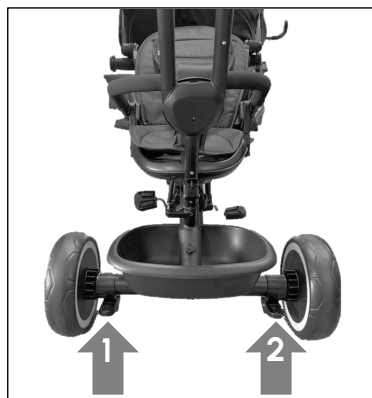

39. To apply the brakes, push down firmly on each pedal with your foot

Note: the brakes operate separately, be sure to engage both sides





40. To release the brake pedals, insert your toes under the pedal and push upwards




Opening/removing the bumper bar

41. The bumper bar (N) can be opened to allow easy access for the child.

Depress the button in the centre of the bumper bar (N) and swing each side outwards

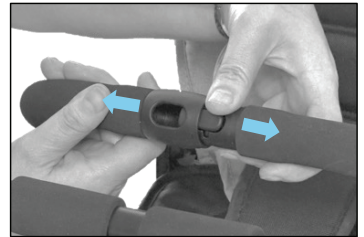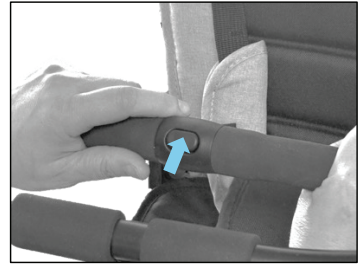


42. To remove the bumper bar (N) entirely, depress the buttons at either side of the seat unit and remove

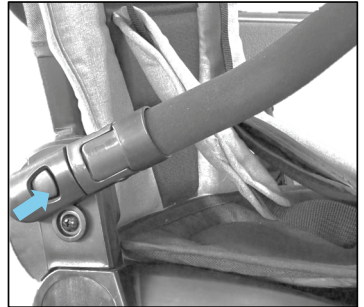

Removing the rear wheels

43. The rear wheels (A) can be removed for cleaning and/or storage.

To remove the rear wheels, press on the metal button at the top of the brake housing

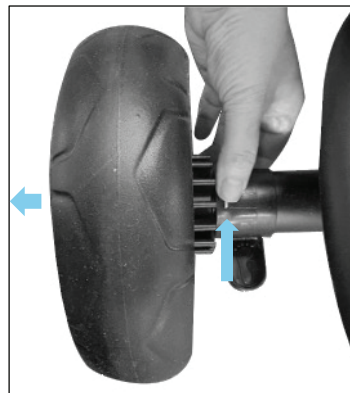


Removing the seat back

44. To remove the back from the seat unit (I), remove the covers and harness and depress the buttons on both sides



45. Lift the seat back from the seat base

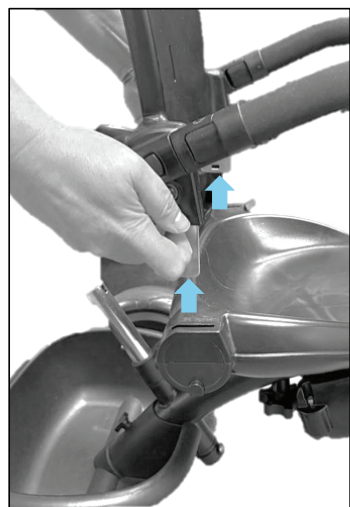

Notes

Handwriting practice lines consisting of 20 sets of three horizontal dashed lines.

